




WT™ Series Food Grade PVC Material Handling Hose

General Applications:

- Food grade liquids such as potable water, beer, wine and juice
- Food grade material handling – standard duty
- Material handling – standard duty
- Pharmaceutical product transfer
- Plastic processing equipment
- Pneumatic conveying equipment
- Poultry processing

Construction: PVC tube with rigid PVC helix.

Service Temperature: -4°F (-20°C) to 150°F (+65°C)*

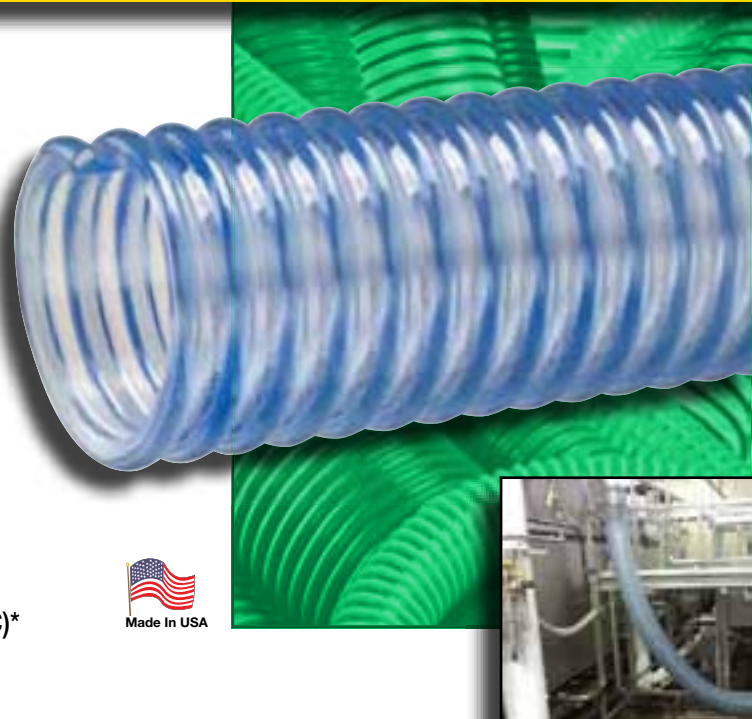

Features and Advantages:

- **Superior Product Design** – Tigerflex™ WT™ series hoses are an industry standard for pneumatic material handling due to our specially engineered compound, innovative design and uncompromising quality control. Provides the ideal combination of light weight, flexibility and durability.
- **Food Grade Materials** – Hose complies with applicable FDA⁽⁰³⁾ and 3-A⁽⁰¹⁾ requirements. Hose approved by USDA⁽¹¹⁾ for use in meat and poultry plants.

- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **Convuluted Outer Cover** – Provides increased hose flexibility.

Nominal Specifications

Series	ID (in.)	ID (mm)	OD (in.)	OD (mm)	Working Pressure (psi)		Vacuum Rating (in. Hg)		Min. Bending Radius (in. @ 68°F)	Standard Length (ft.)	Weight (lbs/ft.)
					68°F	104°F	68°F	104°F			
WT100	1	25.4	1.30	33.0	55	30	28	28	2	100/50	0.21
WT125	1¼	31.7	1.60	40.6	50	25	28	28	2	100/50	0.28
WT150	1½	38.1	1.92	48.8	50	25	28	28	3	100/50	0.35
WT200	2	50.8	2.40	61.0	40	20	28	24	4	100/50	0.56
WT225	2¼	57.2	2.74	69.6	40	20	28	24	4.5	100/50	0.65
WT250	2½	63.5	2.99	75.9	40	20	28	24	5	100/50	0.77
WT300	3	76.2	3.64	92.5	40	20	28	24	6	100/50	1.10
WT350	3½	88.9	4.21	107.0	35	18	28	24	8	100/50	1.48
WT400	4	101.6	4.72	120.0	35	18	24	22	10	100/50	1.80
WT500	5	127.0	5.74	145.8	30	15	24	22	16	100/50/20	2.34
WT600	6	152.4	6.91	175.5	30	15	24	22	18	100/50/20	3.70
WT800	8	203.2	8.97	227.8	20	10	20	18	36	50/20	5.53
WT45M	1.77	45.0	2.09	53.0	45	25	28	24	4	50	0.44
WT57M	2.24	57.0	2.68	68.0	40	20	28	24	4.5	50	0.64

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.

NOTE: For details of the following compliances, refer to footnotes listed on page 62.

*Actual service temperature range is application dependent.

3A⁽⁰¹⁾, BSE/TSE⁽⁰²⁾, FDA⁽⁰³⁾, RoHS⁽¹⁰⁾, USDA⁽¹¹⁾

Because we continually examine ways to improve our products, we reserve the right to alter specifications without notice.